


## HIK-IP5201(D)-I3/I5 1 MP CMOS IR Network Bullet Camera



Unit: mm

- 1/4" Progressive Scan CMOS
- Up to 1 megapixel resolution
- Digital WDR
- 3D DNR
- 30 meters IR range
- 12V DC±10% & PoE(802.3af) for non"-D"
- IP66

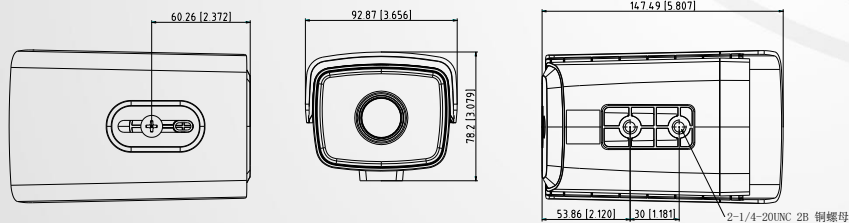



## HIK-IP5201(D)-I3/I5

### 1 MP CMOS IR Network Bullet Camera

#### Specification

| <b>Camera</b>  |  |
|--|--|
| Image Sensor   | 1/4" Progressive Scan CMOS   |
| Min. Illumination  | 0.01Lux @ (F1.2, AGC ON) , 0.028Lux @ (F2.0, AGC ON) , 0 Lux with IR   |
| Shutter Speed  | 1/3 s ~ 1/100,000 s  |
| Lens   | 4mm@ F2.0, Angle of view: 73.1° (6/8/12mm optional)  |
| Lens Mount   | M12  |
| Day & Night  | IR cut filter with auto switch   |
| WDR  | Digital WDR  |
| <b>Compression Standard</b>                                  |  |
| Video Compression  | H.264/MJPEG  |
| H.264 Type   | Baseline Profile / Main Profile  |
| Video Bit Rate   | 32 Kbps – 8 Mbps   |
| <b>Image</b>   |  |
| Max. Resolution  | 1280 × 720   |
| Frame Rate   | 50Hz: 25fps(1280 × 720)<br>60Hz: 30fps (1280 × 720 )   |
| Image Enhancement  | BLC/3D DNR   |
| Image Setting  | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser                                  |
| <b>Network</b>   |  |
| Alarm Trigger  | Motion detection, Dynamic analysis, Tampering alarm, Network disconnect , IP address conflict, Storage exception                       |
| Protocols  | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour  |
| Security   | Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, anonymous access |
| Standard   | ONVIF, PSIA, CGI, ISAPI  |
| <b>Interface</b>   |  |
| Communication Interface                                      | 1 RJ45 10M/100M Ethernet interface   |
| <b>General</b>   |  |
| Operating Conditions   | -30 °C – 60 °C (-22 °F – 140 °F), Humidity 95% or less (non-condensing)  |
| Power Supply   | 12V DC±10%, PoE (802.3af) for non"-D"  |
| Power Consumption  | I3: 3.5W MAX; I5: 4.5W MAX   |
| Protection Level   | IP66   |
| IR Range   | I3: 30m; I5: 50m   |
| Dimensions   | 147.49×78.2×92.87mm  |
| Weight   | 350g   |
| <b>Order Model</b>   |  |
| HIK-IP5201D-I3, HIK-IP5201D-I5, HIK-IP5201-I3, HIK-IP5201-I5 |  |