

HIK-7200SU-F2/N SERIES TURBO HD DVR



Features and Functions

Video Input and Compression

- Connectable to HD-TVI, AHD, network and analog cameras;
- Supports HIKVISION-C protocol for connecting camera over coax;
- H.264+/H.264 video compression, and H.264+ ensures high video quality with lower bitrates;
- Supports channel-zero encoding;

Video Output and Extranet Access

- Simultaneous HDMI, VGA and CVBS outputs. VGA output at up to 1920 × 1080/60Hz resolution. HDMI output at up to 4K (3840 × 2160) resolution for HIK-7208SU-F2/N and HIK-7216SU-F2/N;
- Up to 5MP encoding resolution;
- Manual video quality diagnostics;
- Supports access by Hik-connect Cloud P2P;
- Supports Hikvision DDNS (Dynamic Domain Name System);

Video Recording and Storage

- One-key recording configurable;
- Main stream and sub-stream parameters configurable for simultaneous recording;
- Supports locking and unlocking of video files;
- HDD quota and group management; different capacity can be assigned to different cameras under quota mode;
- Two SATA interfaces provided;
- Supports Cloud storage (One Drive, Google Drive or Drop Box);

Video Playback

- Instant playback for assigned camera during multi-channel live view mode;
- Up to 4/8/16-ch synchronous playback at 5MP resolution;
- Playback at up to 256X speed;
- Main stream and sub-stream selectable for local/remote playback;
- Playback by smart search and VCA search;
- Customization of tags, searching and playing back by tags;

Alarm

- Alarm for video loss, motion detection, video tampering, etc.;
- Supports 2-ch VCA (line crossing detection, intrusion detection or audio exception detection);


Physical Interfaces

- One RJ45 10M/100Mbps self-adaptive network interface for HIK-7204SU-F2/N and one RJ45 10M/100M/1000M self-adaptive Ethernet interface for HIK-7208SU-F2/N and HIK-7216SU-F2/N



Specifications

Model		HIK-7204SU-F2/N	HIK-7208SU-F2/N	HIK-7216SU-F2/N	
Video/Audio input	Video compression	H.264+/H.264			
	Video input	4-ch	8-ch	16-ch	
		BNC interface (1.0Vp-p, 75 Ω), supporting coaxitron connection			
	Supported HDTV input	1080p/25Hz, 1080p/30Hz, 720p/25Hz, 720p/30Hz, 720P/50Hz, 720p/60Hz, 3MP	1080p/25Hz, 1080p/30Hz, 720p/25Hz, 720p/30Hz, 720P/50Hz, 720p/60Hz, 3MP, 5MP		
	Supported AHD input	720p/25Hz, 720p/30Hz			
	CVBS input	Support			
	IP video input	2-ch			
		Up to 4.0 MP resolution			
Audio compression	G.711u				
Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)				
Video/Audio output	CVBS output	Support			
	HDMI/VGA output	VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60 Hz			
		HDMI: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	Encoding resolution	5MP@12fps/3MP@15fps/1080p/720p/WD1/4CIF/VGA/CIF			
	Frame rate	Main stream: 25 fps (P)/30 fps (N)			
		Sub-stream: WD1/4CIF@12fps (non-real-time); CIF/QVGA/QCIF (real time)			
	Video bitrate	32 Kbps to 10 Mbps			
	Audio output	1-ch, RCA (Linear, 1 KΩ)			
	Audio bit rate	64 Kbps			
	Dual-stream	Support			
Stream type	Video, Video & Audio				
Synchronous playback	4-ch	8-ch	16-ch		
Network management	Remote connections	128			
	Network protocols	TCP/IP, PPPoE, DHCP, Hik-connect Cloud P2P, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF			
Hard disk	SATA	2 SATA interfaces			
	Capacity	Up to 6TB capacity			
External interface	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the audio input)			
	Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface		
	USB interface	2 × USB 2.0			
	Serial interface	1; RS-485 serial interface, half-duplex			
	Alarm in/out	4/1	8/4	16/4	
General	Power supply	12 VDC			
	Consumption (without HDD)	≤ 15W	≤ 20W	≤ 20W	
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)			
	Working humidity	10% to 90%			
	Dimensions (W × D × H)	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)			
	Weight (without HDD)	≤ 1.5 kg (3.3 lb)	≤ 2 kg (4.4 lb)	≤ 2 kg (4.4 lb)	

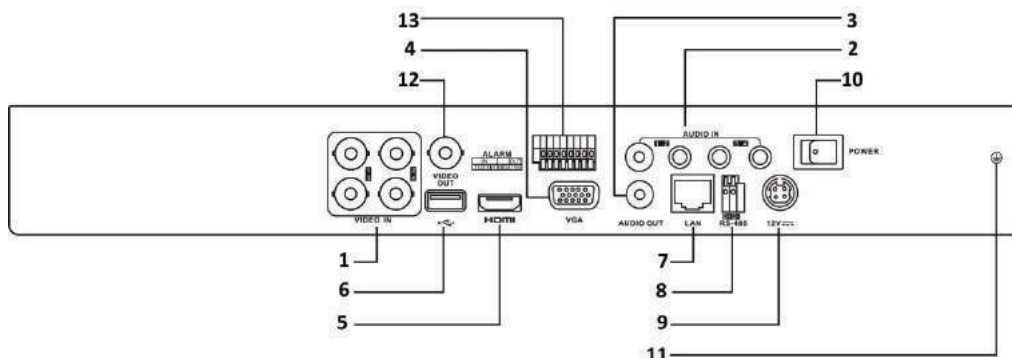

The rear panel of HIK-7208SU-F2/N and HIK-7216SU-F2/N provides 8 and 16 video input interfaces respectively.

Index	Description	Index	Description
1	VIDEO IN	8	RS-485 Serial Interface
2	AUDIO IN, RCA Connector	9	12VDC Power Input
3	AUDIO OUT, RCA Connector	10	Power Switch
4	VGA Interface	11	GND
5	HDMI Interface	12	VIDEO OUT
6	USB Interface	13	Alarm in/out
7	LAN Network Interface		

Available Models

HIK-7204SU-F2/N, HIK-7208SU-F2/N, HIK-7216SU-F2/N

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com